




# KET-RTU-310

## Applications

- Monitoring consumption
- Building management system
- Smart City

## order code

- KET-RTU-310.24
- KET-RTU-310.MWPEN

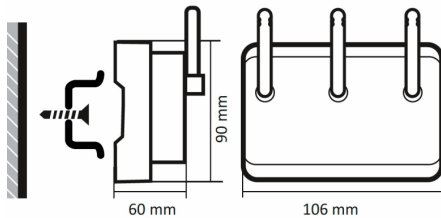

## Advanced X-Monitor gateway with 4G/LTE-M modem and Wi-Fi™

- 4G/LTE-M, Wi-Fi™ and X-Monitor (X-MP) connectivity
- Bidirectional RS485 port
- ModBUS TCP/IP Server
- Native integration with X-Platform

The **KET-RTU-310 Gateway**, the central core of the **X-Monitor** network, stands out for its **advanced functions** and **large memory capacity**, key elements for efficient data management. Connection flexibility is ensured by the **integrated 4G/LTE-M modems (optional)** and **Wi-Fi™ support**, eliminating the need for a LAN connection and expanding installation possibilities even in environments without cabling. Thanks to the **Linux** operating system, the gateway utilizes standard libraries to ensure a high level of security and reliability in data transmission. The installation and management of sensor networks, even complex ones, are extremely simple thanks to the included **X-Manager** software and the intuitive **integrated web interfaces**. These allow for quick configuration of the necessary parameters and real-time monitoring of acquired measurements. In addition to the ability to export data to external platforms like **X-Platform**, the device offers a **large internal SD memory** capable of storing data for periods exceeding three months, ensuring operational continuity and the availability of measurement history. The integrated **RS485 port** supports both **Master RTU** and **Slave RTU** modes, offering dual functionality: direct connection of devices to the gateway or access to the registers of connected devices via an external Master RTU. The **ModBUS TCP/IP server** incorporated in the KET-RTU-310 facilitates the integration of the **X-Monitor** network with **SCADA systems**, **PLCs (programmable logic controllers)**, and **HMI (human-machine interface) systems**, expanding data control and visualization possibilities. Interoperability with proprietary data collection systems is further enhanced by support for data transmission via **REST / JSON web services** and the **IEC 60870-5-104 protocol**, ensuring flexible and standardized communication.

## Technical Features

|                        |   |
|------------------------|---|
| General specifications | <b>Protection Range:</b> Front: IP40; Screw Terminals: IP20<br><b>Operative Temperature:</b> -20 ÷ +70 °C<br><b>Storage Temperature:</b> -20 ÷ +85 °C<br><b>Relative Humidity:</b> MAX 80% not condensing   |
| Case                   | <b>Dimensions:</b> 106 x 90 x 60 mm (W x H x D)<br><b>Mounting:</b> Wall mounting or on DIN rail<br><b>Required DIN modules:</b> 6 DIN modules<br><b>Electric Board Type:</b> Industrial or switchboard<br><b>Material:</b> Blend PC/ABS self extinguishing UL94-V0                                 |
| Power supply           | <b>Supply Voltage:</b> 100 ÷ 240 VAC (50-60 Hz) or 12 ÷ 24 VDC, 12 ÷ 20 VAC<br><b>Consumption:</b> 6 W @ 100 ÷ 240 VAC / 6 W @ 12 ÷ 24 V AC/DC<br><b>Connectors types:</b> Removable screw terminals  |
| Ups                    | <b>Battery Type:</b> Internal lithium 1 Ah<br><b>Approximate Battery Life:</b>  |
| Datalogger function    | <b>Memory Type:</b> Flash up to 128GB internal microSD card not accessible, 1GB RAM DDR3<br><b>Data Storage Capacity:</b> For a period of over 3 months   |
| Processors             | <b>Processor Type:</b> Allwinner A20 CPU for the Linux operating system   |
| Rs485 interface        | <b>Channels:</b><br><b>Supported Protocols:</b> Master or slave ModBUS RTU<br><b>Communication Rate:</b><br><b>Isolation:</b><br><b>Connectors types:</b> Removable screw terminals   |
| Ethernet interface     | <b>Supported Protocols:</b> 10/100/1000 Base-T<br><b>Communication Rate:</b><br><b>Connectors types:</b> RJ45   |
| Analog outputs         | <b>Output Type:</b> Video: HDMI output for OEM use; Touch: a dedicated USB for OEM use; 2 USB ports for FW upgrade and data transfer  |
| Radio module           | <b>Supported Protocols:</b> X-Monitor Protocol (X-MP) / IEEE 802.15.4<br><b>Radio Frequency:</b> 2.4 GHz ISM Band<br><b>Output Power:</b> +3 ÷ +20 dBm<br><b>Sensitivity:</b> -104 dBm<br><b>Antenna Type:</b> RPSMA connector, 90° antenna supplied<br><b>Max Distance (Free Air):</b> Over 1000 m |
| Modem                  | <b>Supported Protocols:</b> 4G/LTE-M<br><b>Radio Frequency:</b><br><b>Antenna Type:</b> SMA connector<br><b>SIM Type:</b> Mini-SIM  |
| Wi-fi                  | <b>Supported Protocols:</b> IEEE 802.11b/g/n standards: 64/128-bit WEP, TKIP, AES, WPA, WPA2<br><b>Radio Frequency:</b> 2.4 GHz ISM Band<br><b>Antenna Type:</b> RPSMA connector, 90° antenna supplied  |