




## Rack door opening sensor with magnet included

- Flat profile of 5 mm
- Operating distance from 25 to 40 mm
- Cable 4 poles black 3 m

# KET-RKP-100

### Applications

The **KET-RKP-100** is a magnetic contact for visible installation on non-ferromagnetic and ferromagnetic **rack doors**. A **flat profile** of only 5mm makes it suitable for installation on aluminum doors even between the door and doorframe. In this position, moreover, the contact is particularly sensitive, reaching an operating distance of 40mm. In case of coplanar installation the operating distance is **25 mm**. The 3 m cable outlet is available both from the side and from the fixing side.

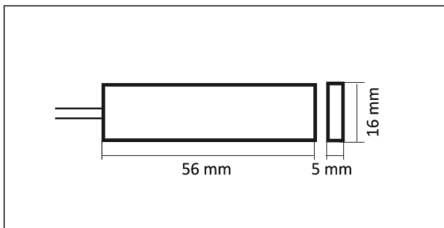

### Technical Features

General specifications	<b>Protection Range:</b> IP2 <b>Operative Temperature:</b> -10 ÷ +40 °C
Case	<b>Dimensions:</b> 60 x 16 x 5 mm (W x H x D) <b>Mounting:</b> Visible on non-ferromagnetic and ferromagnetic rack doors <b>Material:</b> Black ABS
Power supply	<b>Supply Voltage:</b> 60 VDC @ 500 mA <b>Connectors types:</b> Cable 4 poles black 3 m
Certifications	<b>Referends Standard:</b> EN50131-2-6 <b>Approvals:</b> IMQ <b>Security:</b> Class II